

HIGH PERFORMANCE ENTRANCE MATTING

INTRAlink Low Profile

A heavy duty interlocking tile system, suitable for shallow recessed areas and for surface mounting. A versatile and cost effective system that offers exceptional durability and performance for high traffic areas.



STRENGTH RATING - HIGH




ZONAL OPTION - 1 AND 2



BASIC RANGE OF DESIGN OPTIONS



WARRANTY - 5 YEARS

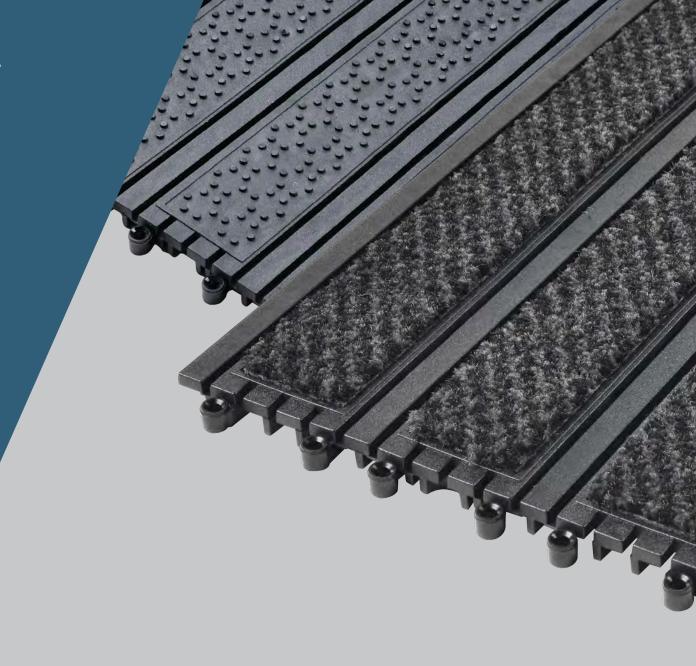

SPECIFICATION

Product Reference	INTRAlink Low Profile PVC Grid Entrance Matting INTRAlink Low Profile Plain PVC Grid Entrance Matting	
Strength Rating	High - suitable for areas with heavy foot and wheeled traffic	
Zonal Location	High Traffic environments Zone 2 Interior area – with high quality polyamide fibre inserts Zone 1 Exterior area – Plain tile version	
Construction	Heel-proof Open Construction Interlocking Tile Format – Tile size 305mm(L-R) x 183mm (F-B) UV resistant, hardwearing and elastic PVC – with polyamide fibre inserts	
Typical Application	High Traffic locations such as Public Buildings, Commercial Offices, Shopping Centres etc	
Design Options	Basic range of design options Packaged in cases of 18 tiles (1m2) for ease of delivery and fitting	
Weight	8.3kg/m2	
Matwell Framing	INT014 / INTR012	
Slip Rating	Will vary with insert, in excess of PTV 38	
Warranty	5 years	

INSERTS

Premier Polyamide



Other colours available on request

007 Anthracite

Tile Colour






Available with inserts or as plain tile

Black

Grey

PROFILE

INTRAlink




A 14mm

B 11.5mm

C 183mm Tile Module

INTRAlink Plain



A 14mm

B 11.5mm

C 183mm Tile Module

Finished Floor surface


2 Recessed matwell frame

3 Levelling latex to matwell base

4 Screed sub-floor

5 Screw fixings

.99

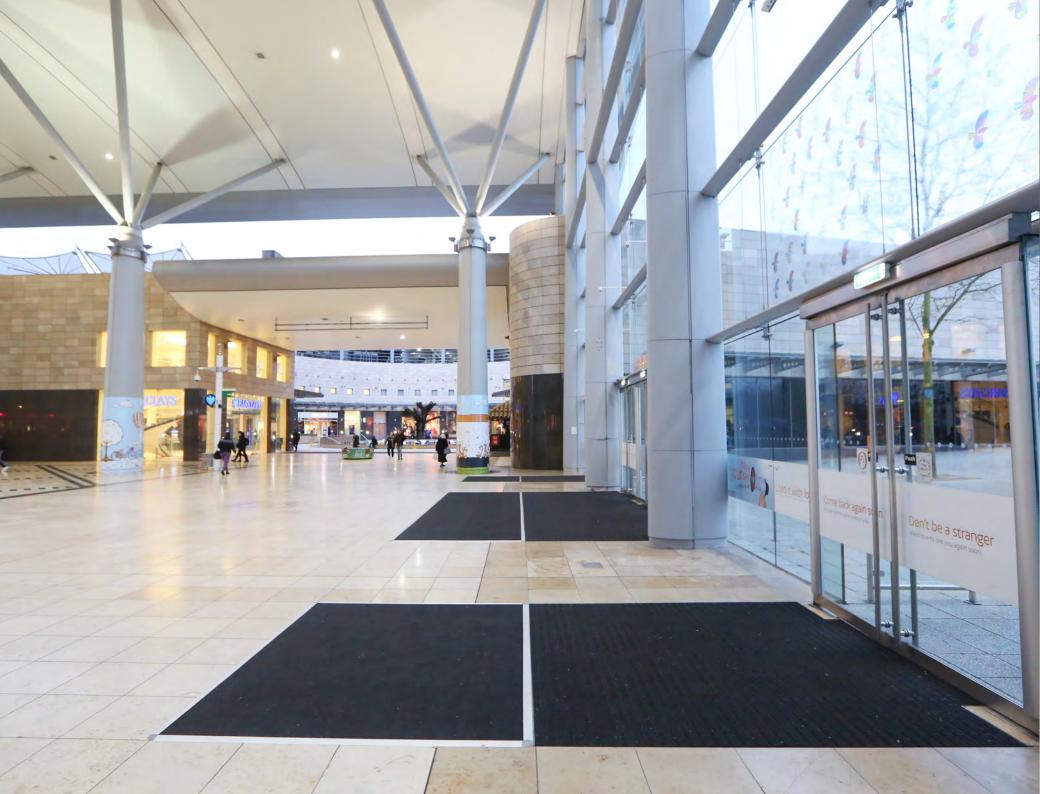







INTRAlink Low Profile

	2	3
1	5	4

- Intu, Milton Keynes
 Eden Shopping Centre
 Eden Shopping Centre
 Dolphin Shopping Centre
 Odeon, Swansea



